




SIPHONS ABLÄUFE

327 x 164(185)

Ø 110/100/  
90/75



255

490



## HL Rain hoppers

17. Rainwater drainage

DN110 **17**



# HL Rain hoppers

## Basic information about design and installation

The drainage of roof rainwater into the sewer or a soakaway belongs to today's normal standard of modern buildings. In the best case the connection between the downpipe and the sewage pipe is a rain hopper.

We have assembled some suggestions for you for perfect design and realization:

▲ Rainwater downpipes should have a possibility for cleaning, maintenance and inspection at the junction to the horizontal pipe.

▲ If rainwater downpipes are connected to the sewer, they have to be secured by a stench trap (in cold regions frostproof), when stench may be expected.

▲ The maximum roof surface, which may be drained, is calculated on the basis of the capacity of the downpipes acc. EN12056-3 and a minimum rainfall quantity of 300 l / (s x ha).

▲ Extract of ÖNORM B2501  
Rainwater downpipes, which are installed on the outer side of the building, must be

connected to rain hoppers. The rain hoppers may be seen as the best cleaning access.

### Relevant standards/directives

- ÖNorm B2501 . . . . .Drainage of buildings
- DIN 1986-100 . . . . .Drainage systems for buildings and estates
- EN 12056 . . . . .Gravity drainage systems inside of buildings

Drain capacity: 11 l/s: more than 50% higher capacity!



Cover and flap: with pre-formed gaskets - to reduce uprising of smell from the sewer



Connection of downpipe: possible up to diameter 120mm



Leaf catcher: Bigger and with overflow-function; if the basket is full of leaves, the middle pipe cares for a minimum drainage



Outlet: Connection DN110 and DN125 in one piece



New handle: for easy opening



Pipe cover: excentric and horizontal stepless adjustment; height 50mm, to cover dilatations of the downpipe



## HL Rain hopper - HL600NHO


With curtain walls the downpipe very often is hidden between the brick wall and the curtain facade. In this case a normal rain hopper may not be used, as the opening of the lid no longer is possible. Beside of that there has to be a watertight connection between downpipe and rain hopper. We have got the solution: HL600NHO! With all advantages of the new rain hopper HL600N, but with a watertight socket connection DN110!





## HL rain hoppers - HL601i The perfect extension for every kind of surface

The accessory HL601i (like individual) creates your individual pavement design around the house

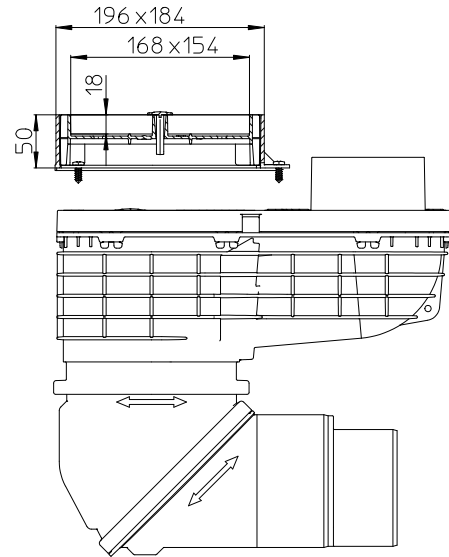

## HL rain hoppers – HL600N Installation instructions



1. Place rain hopper



2. Chose and insert the right pipe cover



3. Connect to the down pipe



4. Adjust angle to the sewer



5. Connect to sewer  
DN110 - directly  
DN125 - Cut with a saw



6. Ready

## HL Rain hoppers - HL600N - Maintenance / cleaning



1. Contamination by e.g. leafs



2. Open lid




3. Empty leaf catcher

# HL Rain hoppers – Products – Data

**HL600N** High capacity rain hopper with flexible ball joint

**HL600NG** Rain hopper like HL600N, but with visible parts made of cast iron


Data	
Capacity	DN100: 10l/s DN125: 11l/s
Material	HL600N: PP HL600NG: PP/Guss
Inlet	Pipe joints DN80, DN100, DN120
Outlet	DN110 or DN125, horizontally and vertically adjustable from 0° to 90°
Trap	Frost proofed flap with rubber gasket
Standard	DIN 12056, Önorm B 2501
Recommended for	Connection downpipe to sewer with inspection possibility
Including	Leaf catcher with overflow, with pipe joints for downpipes Ø 80, 100, 120 and lid with rubber gasket
Add. information	Suitable for outdoor

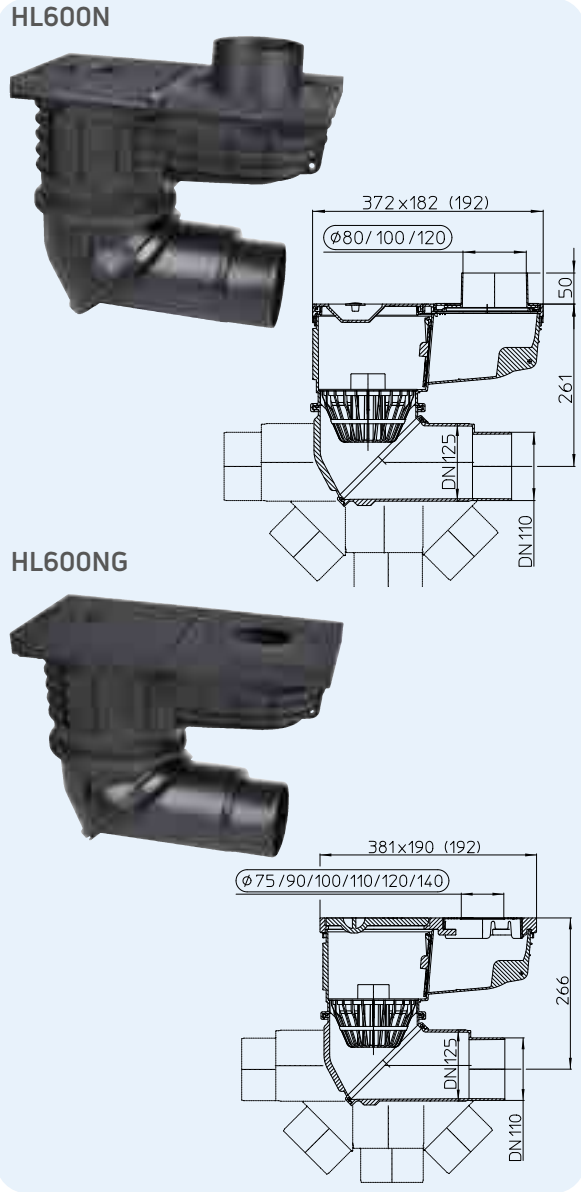

HL-No	Dimension	Surface	Weight	EAN	Piece/package
600N	DN110/125	PP	1627 g	+044122	1
600NG	DN110/125	Guss	8800 g	+044696	1

**HL601i** Extension for individual pavement styling

Data	
Material	PP
Height	5 cm
Recomm. for	Filling of gravel, tiles stones...to style your individual pavement around the house. Equipped with lid for easy cleaning and maintenance

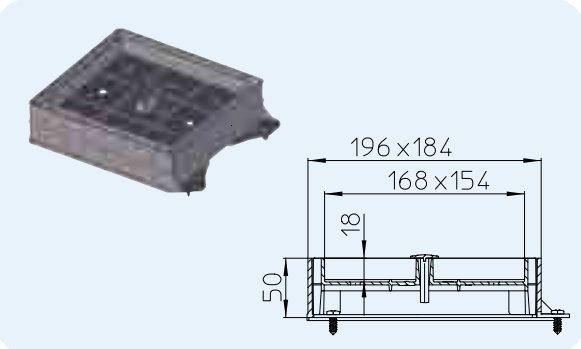

HL-No	Dimension	Weight	EAN	Piece/package
601i	196x184 mm	328 g	+044191	1


**HL600NHO** Rain hopper with horizontal inlet for curtain walls

**HL600NGHO** Rain hopper like HL600NHO, but with visible parts made of cast iron


**Data**

Capacity	DN100: 10l/s DN125: 11l/s
Material	HL600NHO: PP HL600NGHO: PP/Guss
Inlet	DN110 socket
Outlet	DN110 or DN125, horizontally and vertically adjustable from 0° to 90°
Trap	Frost proofed flap with rubber gasket
Standard	DIN 12056, Önorm B 2501
Recommended for	Connection of downpipe to sewer behind a curtain wall
Including	Leaf catcher with overflow
Add. information	Suitable for outdoor

**HL600NHO**

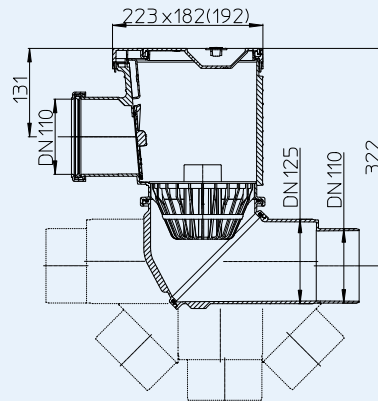

**HL600NGHO**

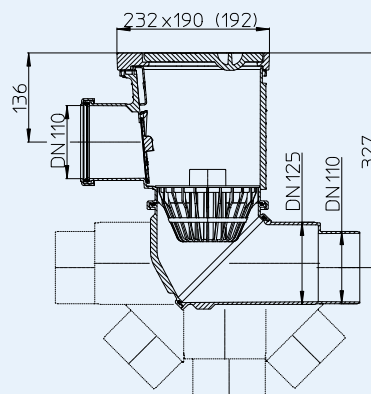

**HL600NHO HL600NGHO**

HL0600N.2E



HL0600N.4E



HL0600N.3E



HL-No	Dimension	Surface	Weight	EAN	Piece/package
600NHO	DN110/125	PP	1556 g		1
600NGHO	DN110/125	Guss	6400 g		1