


New at HL



HL800P

Moisture-protective PVC sealing kit DN110 for pipe inflow channels

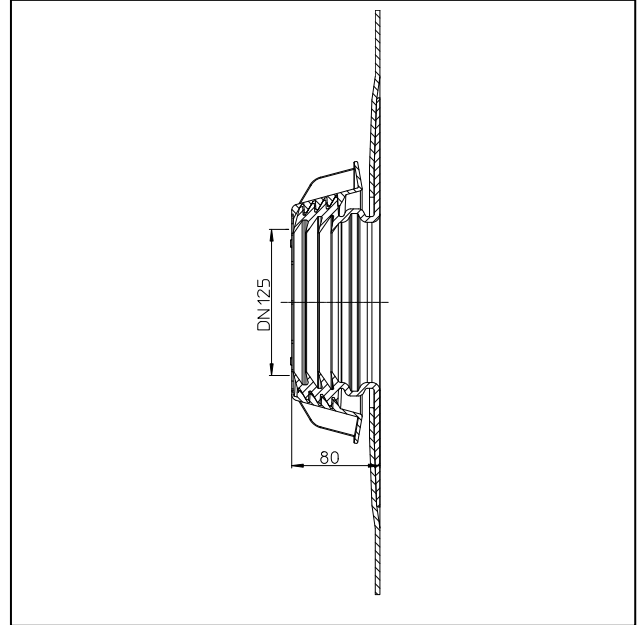

HL800P – Solution for long lasting dry cellars

Moisture-protective PVC sealing set for easy, quick, and safe connection of pipe inlets with PVC hydro isolation on the cellar walls. It prevents water and moisture, which could pass between pipe and cellar wall hydro isolation, to make damages in cellar. It is very hard to provide secure connection of hydro isolation and outlet pipe. Solving this problem is main advantage of HL800P. With this product we are helping in securing and maintaining cellars to stay dry and available for undisrupted usage.

Attitudes/applications:


Sealing set for pipe inlets for outer walls of the cellar / base to protect against ground moisture according to DIN 18195-4. Basically all subterranean building fragments should be protected against ground moisture by PVC or bitumen sheeting and coating.

Advantages:

- Massive lip seal with conical external screw thread made of high-quality rubber.
- The prefabricated PVC flange may be connected directly (by gluing or welding) to all conventional PVC sheeting / PVC coating. The sealing set may be used for pipes with spigot end or with sleeve socket.
- May be used for all plane pipes (plastic, cast iron, stainless steel...) with outer diameter **100/125/150 mm**.
- The installation near the base of the building edge is possible because of HL800P elastic PVC flange.
- Water tightness until +/- **10°** deviation from the right angle.
- Water tightness was tested until **0,6 bar**.
- The solid plastic nut seals and fixes the pipe, on the other side it protects against stones outside of the cellar.

- **Product assembly**

HL 800P consists of:

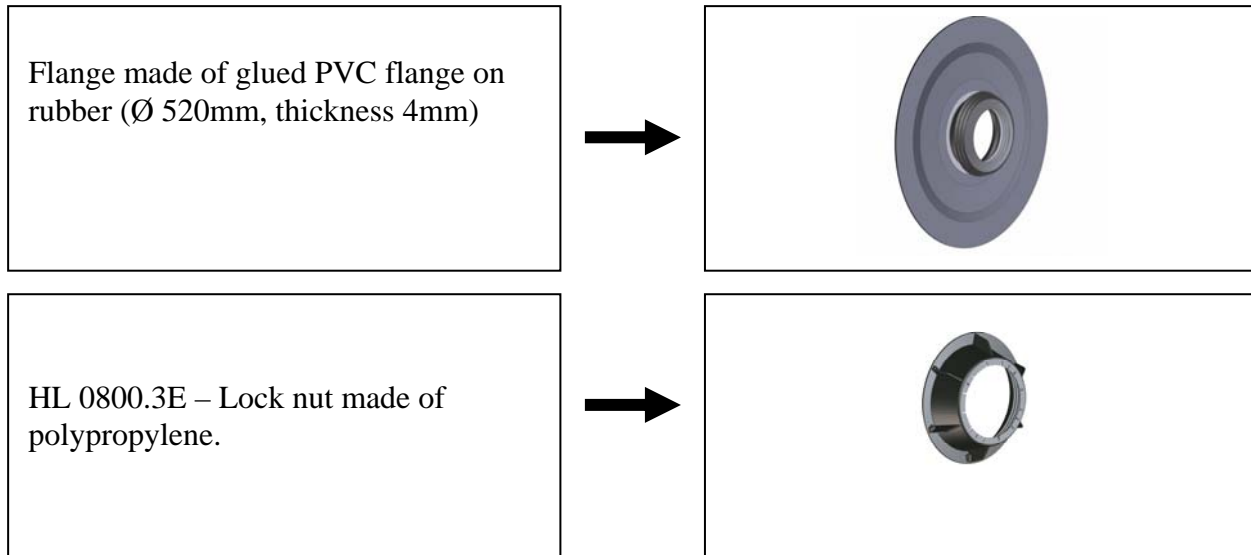

- **Packaging:** Single in carton box 580mm x 580mm x 93mm, 34 pieces/pallet.
- **Possible sizes to order:** HL800P/160, HL800P/125, HL800P/100
- **Weight:** 1,9kg /piece.
- **EAN-Code:** 9003076028276
- **Price:** see price list

Suggestion and additional information:

Product can be combined with other product's spare parts from series HL800/160. In this way it is possible to secure cellar wall inlets with diameters from 8-52 mm. This reduction set, HL801, and HL800P/160 are optimal solution for connection of cellar wall hydro isolation with electric cables, gas pipes, water supply pipe, heat pump pipe, etc.